

ポリブチレンテレフタレート (PBT)

DURANEX®

310NF

EF2001/ED3002

ノンハロ難燃・高耐ト
ラッキング

Introduction

The **DURANEX® PBT NF Series** is comprised of self-extinguishing grades that we have developed, which contain non-halogenated flame retardants, in order to meet environmental regulations in countries around the world. UL94 V-0 flame retardance is exhibited without the use of halogenated flame retardants or antimony compounds.


In addition, with significant improvement on flame retardants, the **DURANEX NF Series** exhibits higher electrical and light resistance than our conventional halogenated/non-halogenated self-extinguishing grades. Specifically, they have the following properties:

DURANEX® PBT NF Series properties


- 1. Tracking resistance: PLC≥1 (CTI: 400 V or more, all grades)**
- 2. Non-bleeding type: non-halogenated flame retardant**
- 3. Highest level weather/light resistance (susceptibility to discoloration) among flame-retardant grades**
- 4. Flame retardants utilized that comply with international environmental labels WEEE/RoHS**

Small quantities of fluororesin are used in this material.


< Applications >

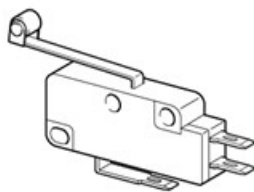


Switches

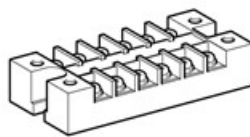


Terminal blocks



Relays

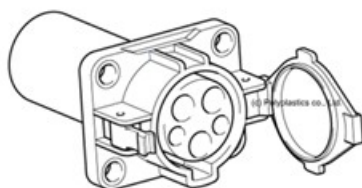

Charging inlets



Storage batteries

1. General Properties of NF Series

Table 1-1 General properties of NF Series (ISO)

Item	Unit	Test method	201NF non- reinforced Standard	310NF GF10% reinforced Standard	315NF GF15% reinforced Standard	315NFK GF15% reinforced CTI/PLC:0	320NF GF20% reinforced Standard	330NF GF30% reinforced Standard
Water absorption (24h. immersion)	%	ISO 62	0.2	0.1	0.2	0.2	0.1	0.1
Density	g/cm ³	ISO 1183	1.32	1.40	1.45	1.45	1.49	1.57
Tensile strength	MPa	ISO 527-1,2	50	70	80	80	90	100
Strain at break	%	ISO 527-1,2	10	3.5	2.8	2.8	2.3	1.7
Flexural strength	MPa	ISO 178	80	120	130	130	140	147
Flexural modulus	MPa	ISO 178	2,800	5,000	6,400	6,400	7,600	10,100
Charpy notched impact strength	kJ/m ²	ISO 179/1eA	3	4	5	5	5	7
Temperature of deflection under load (1.8MPa)	°C	ISO 75-1,2	80	200	207	207	210	214
Flammability		UL94	V-0*	V-0*	V-0*	V-0*	V-0*	V-0*
Dielectric breakdown strength (3mmt)	kV/mm	IEC 60243-1	18	19	19	19	20	22
Volume resistivity	Ω·cm	IEC 60093	6E+16	—	—	—	—	3E+16
Surface resistivity	Ω	IEC 60093	1E+17	—	—	—	—	4E+16
Comparative tracking index	CTI	IEC 60112	600*	550*	550*	600*	500*	600*
Arc resistance	s	ASTM D495	125*	124*	99*	99*	125*	128*
GWFI	°C	IEC 60695-2-12	960	960	960	960	960	960


The above values are representative values obtained by injection molding. They are not minimum values of the material specifications.
The data shown here cannot necessarily be applied "as is" to parts that are utilized under different conditions.
Natural products are used for each evaluation.

* Refer to "2. NF Series Electrical Safety (UL Certification Values)" regarding UL (Underwriters Laboratories Inc.).
All grades are subject to Japan's Ministerial Ordinance for Export Trade Control.

2. NF Series Electrical Safety (UL Certification Values)

2.1 Tracking resistance

The **NF Series** shows excellent tracking resistance as compared with conventional halogenated flame retardant grades. In particular, **201NF**, **315NFK** and **330NF** have been UL certified with the highest PLC Rank of 0.

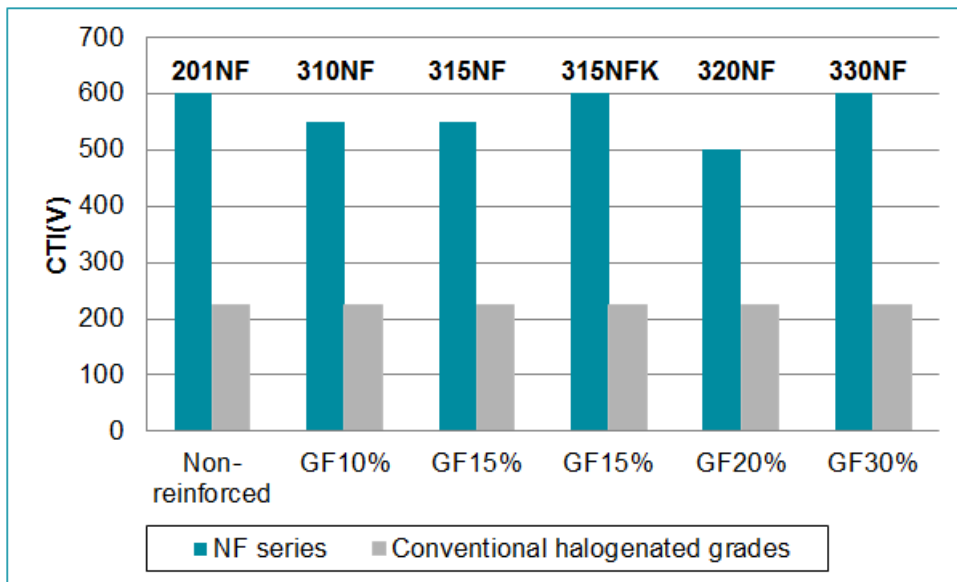

**Fig. 2-1 Tracking resistance of NF series
(comparison with conventional halogenated grades)**

< What is the tracking phenomenon? >

Tracking is the phenomenon of dielectric breakdown that occurs on insulating surfaces caused by moisture or contamination.

When voltage is applied to moist or contaminated insulating surfaces (A), partial evaporation and drying occurs (B).

Voltage is then concentrated in a part of the insulator surface, discharging a minute light emission called scintillation, resulting in some degradation and carbonization of part of the insulator surface due to heat discharge (C).

Carbides then facilitate the flow of electrical discharge, creating a conductive leakage path across the surface of the material by forming a carbonized track. Eventually, short-circuiting occurs between conductors causing combustion (D). This electrical breakdown phenomenon is called tracking.

Using UL's Comparative Tracking Index (CTI), tracking resistance is classified into six ranks (*) according to breakdown voltage.

*CTI PLC (Performance Level Category)

600V ≤ Rank 0

400V ≤ Rank 1 < 600V

250V ≤ Rank 2 < 400V

175V ≤ Rank 3 < 250V

100V ≤ Rank 4 < 175V

Rank 5 < 100V

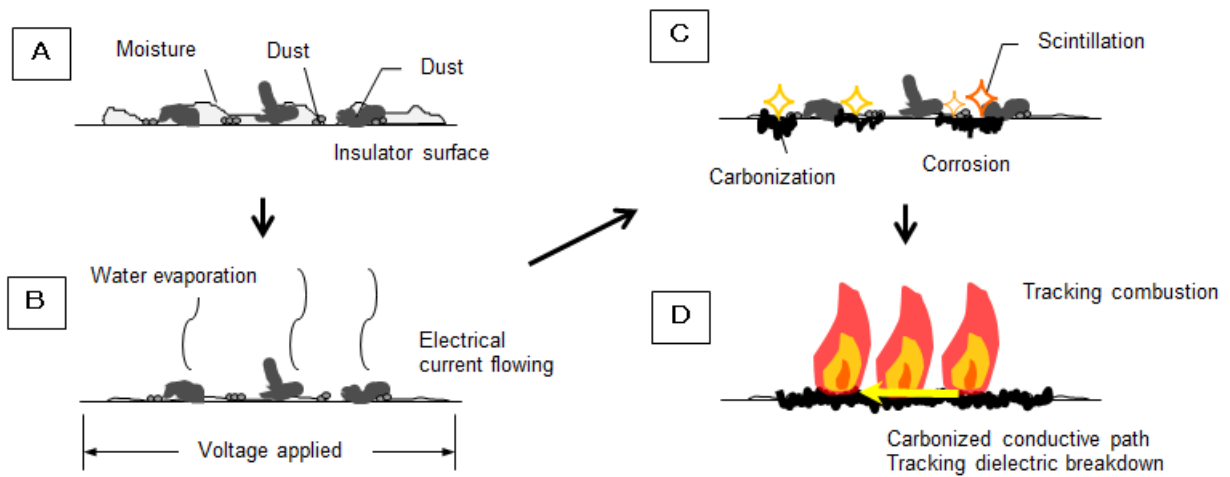


Fig. 2-2 Deterioration by tracking

2.2 UL certification values

Table 2-1 UL certification values of NF series

GF(%)	Grade	Flamability (UL94)	CTI (746A)	HAI (746A)	HWI (746A)	RTI (0.75mm) (746B)			UV&Water (0.75mm) (746C)
						Elec.	Mech.		
							Imp	Str	
Non-reinforced	201NF	V-0 0.75mm	0	0	3 (2 for $\leq 1.5\text{mm}$)	125	110	125	-
10	310NF	V-0 0.75mm	1	0	1	130	125	125	f1 (B)
15	315NF	V-0 0.75mm	1	0	2 (0 for 3.0mm)	130	120	120	f1 (B)
15	315NFK	V-0 0.4mm	0	0	2 (0 for 3.0mm)	130	120	120	f1 (B)
20	320NF	V-0 0.75mm (All) V-0 0.4mm (N&B)	1	0	1	125	125	125	f1 (B)
30	330NF	V-0 0.4mm	0	0	1	125	140	140	f1 (All)

UL registered color are in parentheses. All: All Color, N: Natural, B: Black

Note: For details, please refer to the Yellow Card published by UL (File No. E213445).

3. NF Series Weather/Light Resistance (Susceptibility to Discoloration)


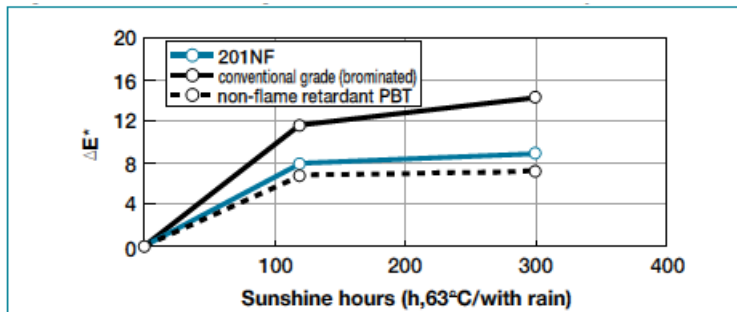


Fig. 3-1 Weather/Light resistance of non-reinforced materials

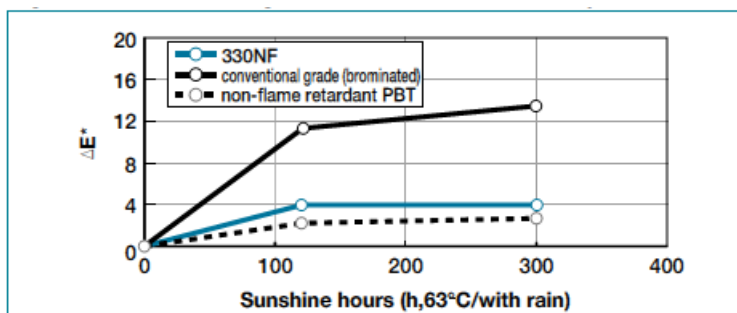


Test instrument : sunshine weatherometer
Black panel temperature : 63°C
Falling rain : yes
* Evaluated with natural color
(color number: EF2001)

Fig. 3-2 Weather/Light resistance of GF30% materials

4. NF Series Moldability

4.1 Flowability

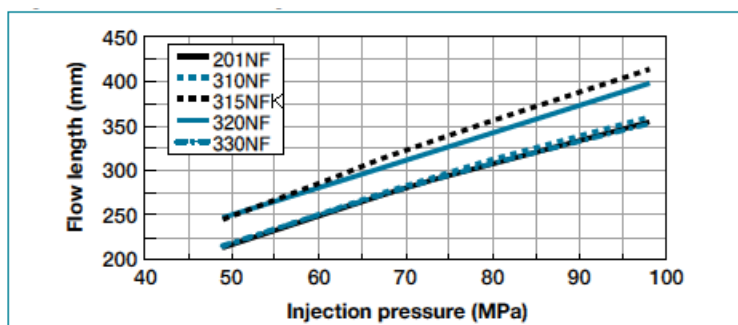

■ Molding parameters

Molding machine : Nissei ES3000
 Cylinder temperature : 260-260-260-260-230°C
 Mold temperature : 60°C
 Injection speed : 4m/min.
 Mold : Bar flow test Mold

Fig. 4-1 Bar flow length (2mmt)

4.2 Mold shrinkage

Table 4-1 Flat plate mold shrinkage (120□×2mmt)

	Direction	Non-reinforced	GF10%	GF15%	GF20%	GF30%
		201NF	310NF	315NFK	320NF	330NF
Holding pressure 59MPa	Flow direction	2.0	1.1	0.7	0.6	0.4
	Transverse direction	2.0	1.5	1.5	1.4	1.4
	Average	2.0	1.3	1.1	1.0	0.9
Holding pressure 69MPa	Flow direction	1.9	1.0	0.7	0.5	0.4
	Transverse direction	1.8	1.3	1.3	1.3	1.2
	Average	1.8	1.1	1.0	0.9	0.8

■ Molding parameters

Molding machine : Nissei ES3000
 Cylinder temperature : 260-260-260-260-230°C
 Mold temperature : 60°C
 Injection speed : 1m/min.
 Mold : 120□×2mm flat plate (side gate: 4w x 2t)

< Notes for molding DURANEX® PBT >

●Predry under the following conditions:

Predrying Temperature 120°C/Predrying Time 5hrs. Predrying Temperature 140°C/Predrying Time 3hrs.

Make sure that the pellet temperature reaches the required level, not the preset temperature of dryer.

To keep the material dry, use of hopper dryer is recommended (95 - 105°C).

●To prevent decomposition of material, follow the recommended conditions below:

1) Optimum material temperature: 240 - 260°C Do not heat above 280°C

2) Maximum residence time in cylinder: Cylinder Temperature/Maximum Residence Time

Slow Burning Type 260°C/30min, Flame Retardant Type 260°C/10min

(The above conditions are typical upper limits and may vary under different conditions.)

(The above molding conditions must be used at all times because acids are generated if the material is exposed to high temperatures (280°C or higher) for a prolonged period.)

●In case the decomposition of the material is seen or suspected, lower the cylinder temperature and purge (discharge) the material from the cylinder.

During purging, wear safety goggles and keep hands and face away from the nozzle section.

●When shutting down the molding operation, purge DURANEX and turn the heater off.

●Do not mix any colorants, additives or resins of other brands with DURANEX except those we recommend.

●For replacing DURANEX with another material, DURANEX should be purged by polyethylene (PE) or polystyrene (PS).

●Keep the work place ventilated locally or entirely during operation.

5. Long-term Stability of Electrical Property

5.1 Comparison of long-term heat stability of insulation resistance


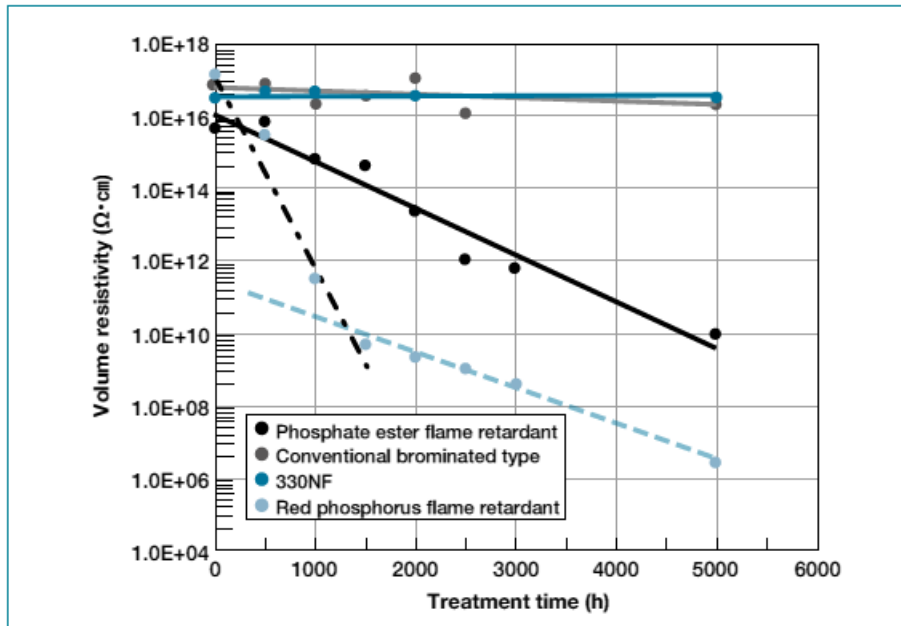


Fig. 5-1 Changes in volume resistivities of molded products heated for extended periods (150°C)

5.2 Comparison of amounts of phosphorus-based soluble decomposition products

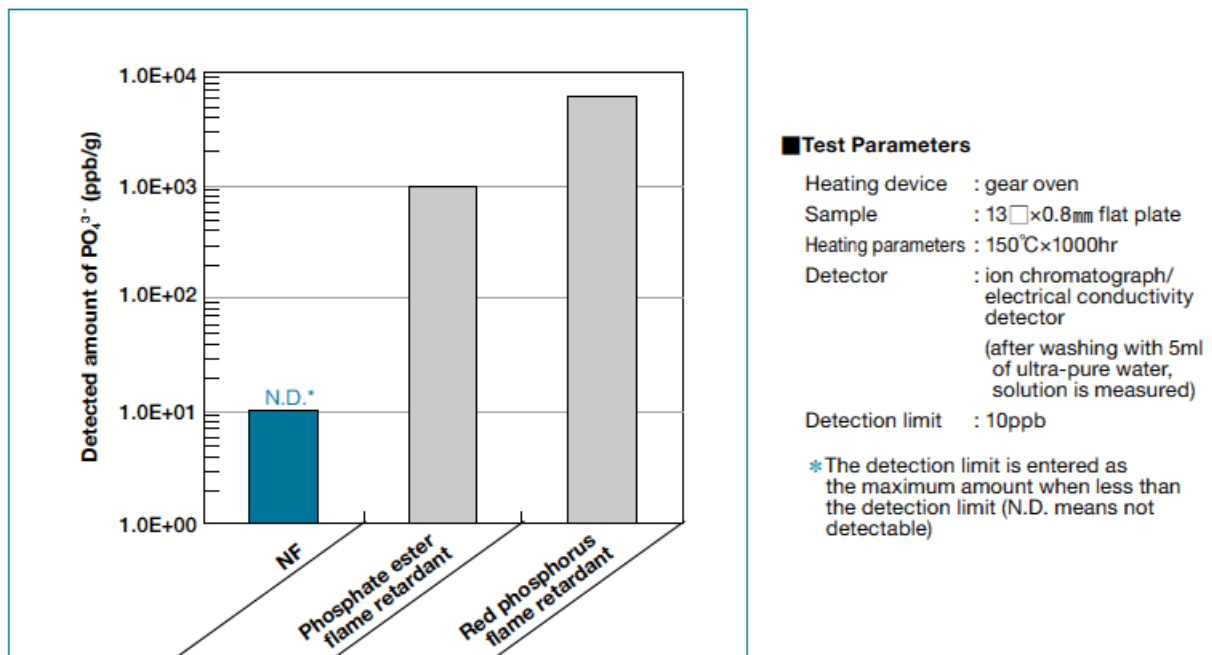

Test Parameters

Heating device : gear oven
 Sample : 13□×0.8mm flat plate
 Heating parameters : 150°C×1000hr
 Detector : ion chromatograph/
 electrical conductivity
 detector
 (after washing with 5ml
 of ultra-pure water,
 solution is measured)
 Detection limit : 10ppb

*The detection limit is entered as
 the maximum amount when less than
 the detection limit (N.D. means not
 detectable)

Fig. 5-2 Phosphoric acid surface precipitation amount during heating of molded products (1000hrs)

取扱い上のご注意

- この資料に掲載した物性値は各種規格や試験法に規定された条件下で得られた試験片等に基づく測定値または代表的な数値です。
- この資料は当社が蓄積した経験および実験室データに基づいて作成したもので、ここに示したデータは異なった条件下で使用される部品にそのまま適用できるとは限りません。
したがって、この内容が貴社の使用条件にそのまま適用できることを保証するものではなく、活用に関しては貴社にて最終判断をお願いします。
- この資料で紹介する応用・用途例などにかかわる技術の権利関係および使用の寿命・可能性などについては貴社にてご検討下さい。
また、当社材料は、医療用途のインプラント(医歯学的移植組織片)に使用されることを想定したものではありませんので、これらの用途にはおおすすめしません。
- 適切な作業の実施に関しては、目的に合った各種材料の技術資料をご参照下さい。
- 当社材料の安全な取り扱いにあたっては、使用される材料・グレードに該当する安全データシート「SDS」をご参照下さい。
- この資料の内容は、作成時点で入手できる資料、情報、データなどに基づいており、その後判明した知見により予告なく改訂することがありますのでご了承下さい。
- 当社製品や説明資料、または、ここに示した注意事項等について、ご不明な点などございましたら、ぜひ当社にお問い合わせの上、ご相談下さい。

DURANEX®、ジュラネックス®は、ポリプラスチックス株式会社が日本その他の国で保有している登録商標です。

ポリプラスチックス株式会社

東京 〒108-8280 東京都港区港南 2-18-1 (JR品川イーストビル)
TEL 03 (6711) 8610

大阪 〒530-0011 大阪府大阪市北区大深町 3-1 (グランフロント大阪 タワーB)
TEL 06 (7639) 7301

名古屋 〒450-6325 愛知県名古屋市中村区名駅1-1-1 (JPタワー名古屋)
TEL 052 (307) 7700

<http://www.polyplastics.com/jp/>