

Polyphenylene Sulfide (PPS)

DURAFIDE®

1140A66

HD9100

GF Reinforced

General Properties of 1140A66

table1-1 General Properties (ISO)

Item	Unit	Test Method	GF Reinforced
			1140A66
			Low Chlorine
Color			HD9100
ISO(JIS)quality-of-the-material display:		ISO11469 (JIS K6999)	>PPS-GF40<
Density	g/cm ³	ISO 1183	1.66
Water absorption (23°C,24hrs,1mmt)	%	ISO 62	0.04
Melt viscosity (310°C,1000/sec)	Pa·s	ISO 11443	260
Tensile strength	MPa	ISO 527-1,2	180
Strain at break	%	ISO 527-1,2	1.7
Flexural strength	MPa	ISO 178	255
Flexural modulus	MPa	ISO 178	14,500
Charpy notched impact strength (23°C)	kJ/m ²	ISO 179/1eA	9.0
Temperature of deflection under load (1.8MPa)	°C	ISO 75-1,2	265
Coefficient of linear thermal expansion (Normal temperature, Flow direction)	x10 ⁻⁵ /°C	Our standard	1
Coefficient of linear thermal expansion (Normal temperature, Transverse direction)	x10 ⁻⁵ /°C	Our standard	4
Electric strength (3mmt)	kV/mm	IEC 60243-1	16
Volume resistivity	Ω·cm	IEC 60093	5 × 10 ¹⁵
Volume resistivity (Our standard)	Ω·cm		-
Relative permittivity (1kHz)		IEC 60250	4.5
Relative permittivity (1MHz)		IEC 60250	4.5
Dielectric dissipation factor (1kHz)		IEC 60250	0.001
Dielectric dissipation factor (1MHz)		IEC 60250	0.002
Tracking resistance (CTI)	V	IEC 60112	125
Flammability		UL94	V-0
The yellow card File No.			E109088
Appropriate List number of Ministerial Ordinance for Export Trade Control			Item 16 of Appendix -1

All figures in the table are the typical values of the material and not the minimum values of the material specifications.

1. Characteristics

1140A66 is a glass fiber 40% reinforced low chlorine content grade, which is developed with the customer's requirement for environment.

2. Chlorine content

Cl content of 1140A66 is less than 900ppm

Property	Unit	1140A66	1140A6
Chlorine content	ppm	≤ 900	2000~2500

*Cl content is measured by Polyplastics.

*Evaluation method: Combustion Ion Chromatography

3. Molding Properties

3-1) Mold Shrinkage

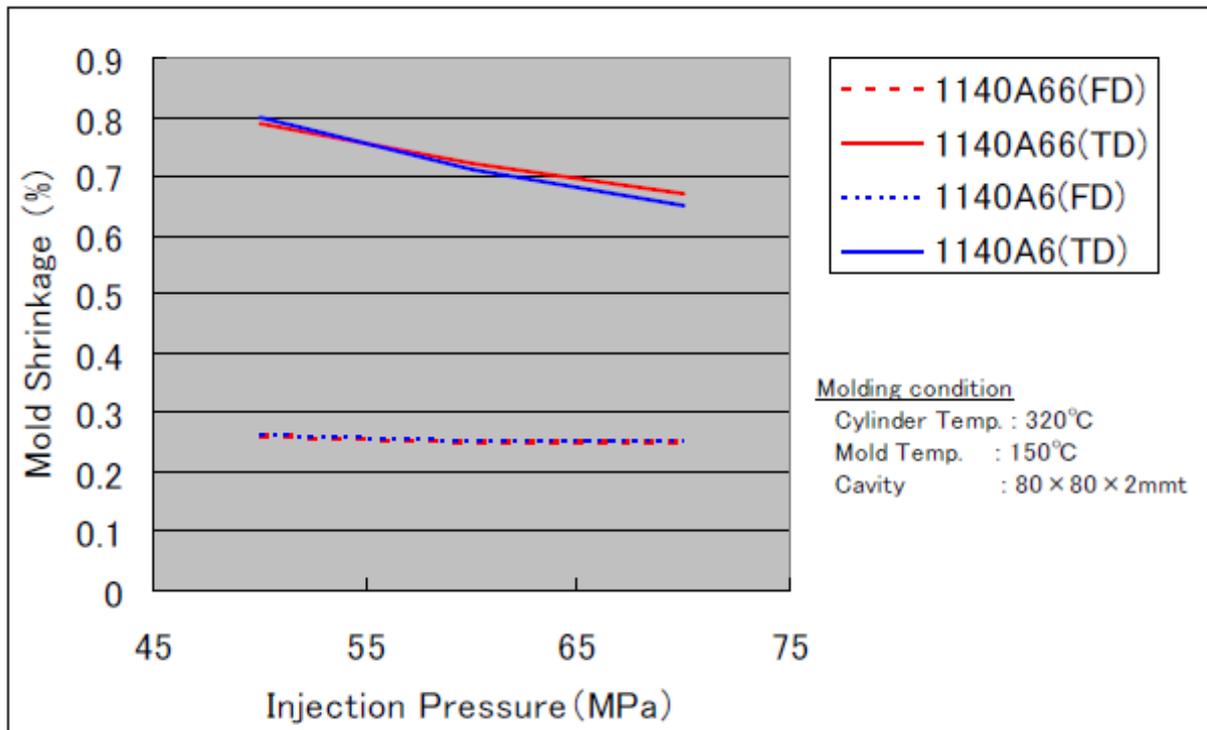


Fig. 3-1 Mold shrinkage

NOTES TO USERS

- All property values shown in this brochure are the typical values obtained under conditions prescribed by applicable standards and test methods.
- This brochure has been prepared based on our own experiences and laboratory test data, and therefore all data shown here are not always applicable to parts used under different conditions. We do not guarantee that these data are directly applicable to the application conditions of users and we ask each user to make his own decision on the application.
- It is the users' responsibility to investigate patent rights, service life and potentiality of applications introduced in this brochure. Materials we supply are not intended for the implant applications in the medical and dental fields, and therefore are not recommended for such uses.
- For all works done properly, it is advised to refer to appropriate technical catalogs for specific material processing.
- For safe handling of materials we supply, it is advised to refer to the Safety Data Sheet "SDS" of the proper material.
- This brochure is edited based on reference literature, information and data available to us at the time of creation. The contents of this brochure are subject to change without notice upon achievement of new data.
- Please contact our office for any questions about products we supply, descriptive literatures or any description in this brochure.

DURAFIDE® is a registered trademark of Polyplastics Co., Ltd. in Japan and other countries.

POLYPLASTICS CO., LTD.

JR Shinagawa East Bldg.,
18-1, Konan 2-chome, Minato-ku, Tokyo, 108-8280 Japan
Tel: +81-3-6711-8610 Fax: +81-3-6711-8618

<http://www.polyplastics.com/en/>